

**FINE FISSURED™**

**FINE FISSURED™ High NRC**

Tegular  
medium texture



1732, 1734, 1820, 1821, 1833



Fine Fissured™ panels with Trimlok® 9/16" suspension system (Pg. 290)



See more photos at:  
[armstrong.com/photogallery](http://armstrong.com/photogallery)  
SEARCH: fine fissured

This economical, non-directional panel available in standard and high acoustical absorption options.


**KEY SELECTION ATTRIBUTES**

- Options provide excellent combination of acoustical performance NRC (up to 0.75), CAC (up to 40), and Articulation Class (170)
- Fine Fissured School Zone® items help comply with ANSI S12.60 Classroom Guidelines
- Non-directional visual reduces scrap and installation time
- 30-Year Limited System Warranty against visible sag, mold and mildew

**TYPICAL APPLICATIONS**

- Offices – closed spaces for privacy and confidentiality; open spaces for focus, collaboration, and teaming
- Schools
- Libraries/band rooms
- Corridors
- Discount stores
- Utility rooms

**COLORS** Due to printing limitations, shade may vary from actual product.

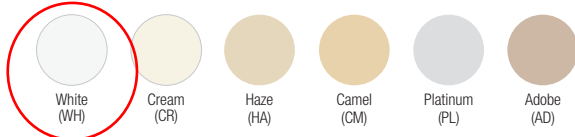

Item 1732 is available in colors. All other items are available in White only. Colored ceilings are dye-lotted and should be segregated by dye lot. Do not mix.

**DETAILS** (Other Suspension Systems compatible. Refer to listing on page 186.)



1. Fine Fissured Beveled Tegular
2. Fine Fissured Angled Tegular
3. Fine Fissured Tegular with Suprafine® 9/16" suspension system

# FINE FISSURED™ FINE FISSURED™ High NRC

Tegular  
medium texture

UP TO **73%** RECYCLED CONTENT  
Calculate LEED contribution at [armstrong.com/greengenie](http://armstrong.com/greengenie)

**LEED®**

- energy management
- construction waste mgmt
- regional materials
- design for flexibility
- EPD
- recyclable/extended producer resp.
- bio-based materials
- recycled content
- sourcing of raw materials
- material ingredient reporting
- low emitting materials
- lighting quality
- acoustics

## VISUAL SELECTION

Edge Profile	Susp. Dwg. Pgs. 295-299 <a href="http://armstrong.com/catdws">armstrong.com/catdws</a>	Item No.	Dimensions (Inches)
<b>FINE FISSURED™ High NRC</b>			
15/16" Angled Tegular	13	<b>1756</b>	24 x 24 x 7/8"
13	<b>1757</b>	24 x 48 x 7/8"	
9/16" Beveled Tegular	29, 44, 48, 52, 56, 60	<b>1758</b>	24 x 24 x 7/8"
29, 44, 48, 52, 56, 60	<b>1759</b>	24 x 48 x 7/8"	

## PERFORMANCE SELECTION

Dots represent high level of performance.


UL Classified Acoustics	Total Acoustics <sup>1</sup>	Articulation Class	Fire Rating	Light Reflect	Anti-Mold & Mildew	Sag Resist	Certified Low VOC Emissions	Durability	Recycled Content	Recycle Program	30-Yr Warranty
NRC + CAC =	NRC + CAC	AC	Fire	Light	Bio-Block	Humi-Guard+					
0.75 + 35 = 35	✓	170	Class A	0.86	•	•	•	Std	•	•	•
0.75 + 35 = 35	✓	170	Class A	0.86	•	Std	•	Std	•	•	1-Yr
0.75 + 35* = 35	✓	170	Class A	0.86	•	•	•	Std	•	•	•
0.75 + 35 = 35	✓	170	Class A	0.86	•	Std	•	Std	•	•	1-Yr

## FINE FISSURED™

15/16" Angled Tegular	12	<b>1732_</b> **	24 x 24 x 5/8"	0.55	35	-	N/A	Class A	0.85	•	•	•	Std	•	•	•
12	<b>1833</b>	24 x 24 x 5/8"	0.55	35	-	N/A	Fire Guard™	0.85	•	•	•	Std	Std	•	•	•
12	<b>1733</b>	24 x 48 x 5/8"	0.55	35	-	N/A	Class A	0.85	•	•	•	Std	Std	•	•	•

<sup>1</sup> Total Acoustics™ ceiling panels have an ideal combination of noise reduction and sound-blocking performance in one product.  
\*\* Add 2-letter color suffix to item number when specifying or ordering (e.g., 1732 C B)

## SUSPENSION SYSTEMS



## PHYSICAL DATA

**Material**  
Wet-formed mineral fiber

**Surface Finish**  
Factory-applied latex paint

**Fire Performance**  
ASTM E84 and CAN/ULC S102 surface burning characteristics. Flame Spread Index 25 or less. Smoke Developed Index 50 or less. (UL labeled).  
Fire Guard: A fire-resistive ceiling when used in applicable UL assemblies.

**ASTM E1264 Classification**  
Type III, Form 2, Pattern C E  
Fire Class A

**Humidity/Sag Resistance**  
HumiGuard® Plus ceiling tiles maintain superior sag resistance. Recommended for areas subject to high humidity, up to, but not including, standing water and outdoor applications.

**Anti-Mold/Mildew**  
Ceiling panels with BioBlock® coating contain a mold-inhibiting agent that resists the growth of mold and mildew.

**VOC Emissions**  
Third-party certified compliant with California Department of Public Health CDPH/EHLB/Standard Method Version 1.1, 2010. This standard is the guideline for low emissions in LEED, CalGreen Title 24, ANSI/ASHRAE/USGBC/IES Standard 189, ANSI/GBI Green Building Assessment Protocol (excludes item 1732 in colors and item 1835).

**High Recycled Content**  
Contains greater than 50% total recycled content. Total recycled content based on product composition of post-consumer and pre-consumer (post-industrial) recycled content per FTC guidelines.

**Insulation Value**  
R Factor – 1.5 (BTU units)  
R Factor – 0.26 (Watts units)

**30-Year Performance Guarantee & Warranty**  
When installed with Armstrong® Suspension System. Details at [armstrong.com/warranty](http://armstrong.com/warranty)

**Weight; Square Feet/Carton**  
1732 – 0.70 lbs/SF; 64 SF/ctn  
1733 – 0.70 lbs/SF; 80 SF/ctn  
1833 – 1.05 lbs/SF; 48 SF/ctn  
1756, 1758 – 1.08 lbs/SF; 40 SF/ctn  
1757, 1759 – 1.08 lbs/SF; 48 SF/ctn

**Minimum Order Quantity**  
1 carton, excludes other sizes

**Metric Items Available**  
1732M, 1733M, 1756M, 1757M, 1758M, 1759M – Metric items are subject to extended lead times and minimum quantities. Contact your representative for more details.