Project Name: Gregg County - Tryon Road & Hawkins Parkway Intersection Project
Client: Gregg County
Longview, Texas
Project Bid #2016-620

STATE OF TEXAS
ROBERT J. MALY
60421
REGISTERED PROFESSIONAL ENGINEER
18 SEPT. 2016

ITEMS FOR ADDENDUM NO. 02

18 SEPTEMBER 2016

NOTICE TO PROPOSERS:

A. This Addendum shall be considered part of the contract documents for the above-mentioned project as though it had been issued at the same time and incorporated integrally therewith. Where provisions of the following supplementary data differ from those of the original contract documents, this Addendum shall govern and take precedence.
B. Proposers are hereby notified that they shall make any necessary adjustments in their estimate on account of this Addendum. It will be construed that each Proposer's proposal is submitted with full knowledge of all modifications and supplemental data specified therein. Acknowledge receipt of this addendum in the space provided on the proposal form. Failure to do so may subject Proposer to disqualification.
C. **Bid Opening has been changed to WEDNESDAY, SEPTEMBER 21 at 2 p.m., at the office of the Purchasing Agent.**
D. **Contractor must use <u>Bid Proposal (Revision No. 1)</u>** when submitting Bid Proposal for consideration.

REFERENCE IS MADE TO THE DRAWINGS AND THE PROJECT SPECIFICATIONS AS NOTED:

BID PROPOSAL (REVISION NO. 1)

A. Bid Item 2 – Added item description for **1 LS - Traffic Plan for Road Closure.**
B. Bid Item 2 – Changed Bid Item 2 **to Bid Item 3** – Mailbox Assemblies (TxDOT Item 560).
C. Bid Item 3 – Changed Bid Item 3 - Erosion Control BMP's to **Item 4.**
D. Bid Item 4 – Moved Bid Item 4 – Furnishing and Placement of 4" of Topsoil to **Item 31.**
E. Bid Items 8 and 9 – Reorder Items so that Bid Item 9 is becomes 8 and Bid Item 8 becomes Bid Item 9.
F. Bid Item 10 – Change the estimated quantity from 2,285 CY to **2,572 CY** for Limestone Flexbase, Grade 2, Type A or C.
G. Bid Item 11 – Added Bid Item 11 – **Prime Coat (MC30 @ 0.2 gal/SY)** rate w/ total expected usage of 283 gallons.
H. Bid Item 11 – Changed Bid Item 11 to Bid Item 12 - **8" Concrete Pavement (3600 psi @ 28 days).**
I. Bid Item 12 – The quantity of 8" Conc. Pavement changed from 9885 SF **to 9415 SF**
J. Bid Item 12 – Changed from Bid Item 12 to **Bid Item 13 – 6" Conc. Integral Curb** along w/ the quantity changing from 467 LF **to 447 LF.**
K. Bid Item 14 – Changed Bid Item from 14 to **Bid Item 15 – 4" Type D HMAC Pavement w/ Tackcoat**
L. Bid Item 15 – Full item description should read **4" Type D HMAC Pavement w/ Tackcoat.** The Bid quantity also changed from 1,305 Tons **to 1,466 Tons.**
M. Bid Item 16 – Moved Bid Item 19 **to Bid Item 16 – Residential Drwy (2" HMAC on 6" Flexbase).**
N. Bid Item 17 – Change from Bid Item 15 **to Bid Item 17 – 18" Curb & Gutter.** Change bid quantity from 840 LF **to 2,376 LF.**
O. Bid Items 17 & 18 - Change Bid items 17 & 18 **to Bid Items 19 – 18" HDPE Storm Drain Pipe & 20 – 18" HDPE Fittings – 45° Bend.**
P. Bid item 18 – Change from Bid Item 16 – 10' Curb inlet to **Bid Items 18 – 10' Concrete Curb Inlet.**
Q. Bid Item21 – Added item description for **174 LF of 18" CL III RCP w/ Filter Fabric Joints.**
R. Bid Item 21 and 22 – Reorder items so that Bid Item 21 becomes Bid Item 22 and Bid Item 22 becomes Bid Item 21.
S. Bid Items 24 thru 29 – Each Bid Item increases in Item No by 1, so that **Item 24 is now Item 25 and so on thru Item 30.**
T. Bid Item 31 – **Bid Item 31 – "Furnishing and Placement of 4" Top Soil"** including up to the edge of pavement,

PROJECT PLANS AND SPECIFICATIONS:

Project Name: Gregg County - Tryon Road & Hawkins Parkway Intersection Project
Client: Gregg County
Longview, Texas
Project Bid #2016-620

AD No. 2, Civil Item 1: **To the Project Plans, Question:** The plans show a prime course on the base. How is this paid for and what is the rate?

Item 11 has been added to the Bid Proposal indicating an MC30 Cutback with a rate of application of 0.20 gal/SY with an anticipated quantity of 283 gallons. This Item shall be paid for under Bid Proposal Item 11.

AD No. 2, Civil Item 2: **To the Project Plans, Question:** The plans show to install RCP at the driveways and add S.E.T.'s to each end. There is no Pay Item for RCP?

There has been a Bid Item for 18" CL III RCP added to the Bid Proposal to cover the cost of this installation. Item 21 calls for 174 LF of 18" RCP for driveway culverts that includes the installation of filter fabric to cover each joint of pipe.

AD No. 2, Civil Item 3: **To the Project Plans, Question:** The plans show topsoil for backfilling the pavement edge. How is this Item paid for?

There has been a Bid Item 31 added that calls for the installation of 4" of topsoil over all disturbed areas prior to placement of Bermuda Sod grass. The topsoil placement is paid for on a per 100-foot station increment across the width of the existing right of way.

ATTACHMENTS: **BID PROPOSAL – REV 1:** **Replace the original Bid Proposal Form with the BID PROPOSAL REVISION 1**

SPECIAL PROVISIONS REVISION1 – PAY ITEMS

END OF ADDENDUM

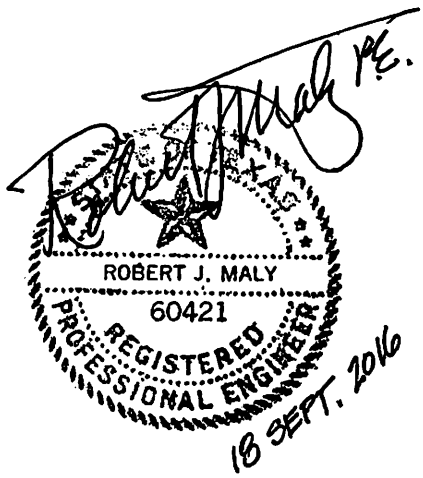

Maly & Associates, Inc.